

Data Sheet Control Panel Trunking Safety

Tested and certificated according to: VDE 0604 2-3 EN 50085-2-3
Underwriter Laboratories

stand: 09.2024

The Control Panel Trunking Safety is extrusion-made out of rigid-PVC and will be punched.

Characteristic:

Material:	rigid-PVC lead-, silicon- and cadmium-free (RoHS conform)		
Operation temperature:	-25°C...+60°C		
working temperature:	>0°C		
Fire behaviour:	hard to inflame	DIN 4102	Level B1
	Self-extinguishing	UL94	V0
	Fire load		5,2 kWh/kg
Dielectric strength:	>30kV/mm		
UV resistance:	PVC is conditionally permanent to UV-light; changes in colour under UV-light cannot be excluded		
Colour:	RAL 5015 blue		
Delivery length:	2.000 mm with cover		

Special property:

- Cover contour 90°
- Ideal fit of cover, easy assembly and disassembly
- Smooth fingers – will not hurt the installer or damage the cables
- Cable hold-back noses from installation height 60 mm onwards
- Web Thickness 5,5 mm; slot width 4,5 mm
- Notch points at the slides
- Perforated base according to DIN 50085-2-3, identical punch picture for each length
- 3- lanes hole pattern starts at width 80 mm
- Attachments and more information's you will find under www.licatec.de



RoHS
konform


Data Sheet Control Panel Trunking Safety

Tested and certificated according to: VDE 0604 2-3 EN 50085-2-3
Underwriter Laboratories

stand: 09.2024

Dimension:

Safety	Höhe (H) in mm	Width (W) in mm				
		30	40	60	80	100
	60		7521-1	7522-1	7523-1	
	80	7530-1	7531-1	7532-1	7533-1	7534-1
	100			7541-1		7542-1

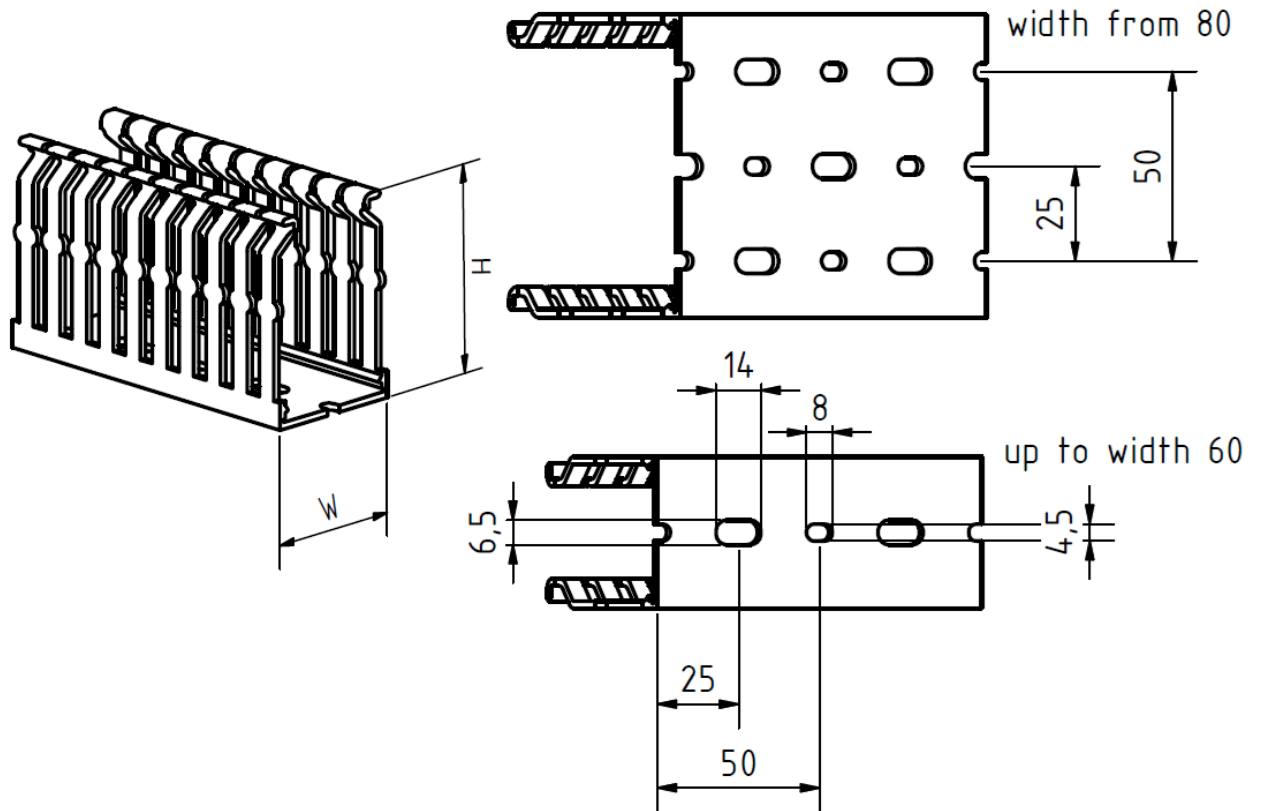

Control Panel Trunking Safety

